




HOLOSUN

2026 CATALOG

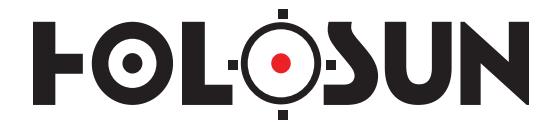

CONTENTS

1 - THERMAL & NIGHT VISION SIGHTS	4
2 - ENCLOSED PISTOL SIGHTS	10
3 - OPEN PISTOL SIGHTS	20
4 - SOLAR CHARGING SIGHTS	34
5 - RIFLE SIGHTS	44
6 - MAGNIFIERS	60
7 - LASERS	66
8 - PRISM SIGHTS	78
9 - WEAPONLIGHTS	82

ABOUT US

At Holosun, innovation is the foundation of everything we do. From our California headquarters to a network of precision manufacturing, we design optics that push technology forward and earn the confidence of shooters worldwide. Whether on the range, in competition, or in the field, every Holosun product delivers on our promise of reliability, performance, and lasting trust.

1 THERMAL & NIGHT VISION SIGHTS



DPS-THERMAL

PRODUCT OVERVIEW

The Holosun DPS-TH (Digital Pistol Sight – Thermal) redefines red dot technology by fusing Holosun's trusted LED red dot optic with an onboard thermal imaging overlay, giving handgun users a groundbreaking edge in low-visibility environments. Built around Holosun's proven 509T footprint, the DPS-TH integrates a 256×192 thermal sensor that displays a thermal overlay on a 640x480 OLED screen at 50 frames per second. This system enables shooters to detect heat signatures in real time while maintaining the fast target acquisition of a red dot. A variety of image modes—White Hot, Black Hot, Highlight, Edge Detection, and Fusion—provide flexibility for multiple operational environments.



TECHNOLOGY & FEATURES

- Red Dot Sight with Fusion Thermal Overlay
- **Modes:** White Hot, Highlight, Outline
- **Refresh Rate:** 50FPS Overlay
- **Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- **Reticle Brightness:** 8 Daylight & 4 Night Vision
- **Sensor Resolution:** 256×192
- **Window Size:** 1.1 x 0.87 in
- **Footprint:** 509T

SKU

DPS-TH



SPECIFICATIONS

FUNCTIONS		ELECTRONIC DATA	
Field of View	13.5°x10°	Red Dot Battery	LiPo
MRTD	<50mK	Camera Battery	1x 18350
MECHANICAL DATA			
Spectral Range	8-14um	Housing Material	7075 T6 Aluminum
Sensor Resolution	256×192	Surface Finish	Anodized
OLED Resolution	640x480	Housing Color	Black
Frame Rate	50FPS	Laser Adjustment Per Click	0.5 MOA
Image Modes	White Hot, Black Hot, Highlight, Edge Detection, Fusion	Laser W&E Travel Range	±50 MOA
External Charging	5V/2A, Magnetic USB	Storage Temperature	-40°C~70°C
		Working Temperature	-20°C~50°C
		Submersion	IP67



DRS-THERMAL

PRODUCT OVERVIEW

The Holosun DRS-TH (Digital Reflex Sight-Thermal) redefines the boundaries of sight by integrating Holosun's renowned red dot sight technology with cutting-edge thermal imaging capabilities. This fusion sight offers a 1024x768 resolution display at an impressive 50fps, allowing users to perceive the unseen with unparalleled clarity. Its innovative design features multiple thermal image modes, including White Hot, Black Hot, Highlight, and Outline, ensuring optimal visibility in diverse environments. The DRS-TH is not just a red dot sight; it's a transformative tool that empowers users to navigate the unseen with precision and confidence.



TECHNOLOGY & FEATURES

- Red Dot Sight with Fusion Thermal Overlay
- Refresh Rate: 50FPS Overlay
- Digital Zoom: 1x, 3x, 5x
- Modes: White Hot, Black Hot, Outline, Highlight
- Multi-Reticle System™ (MRS): 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- Thermal Reticle Options: Cross or T Style
- Sensor Resolution: 256x192
- Reticle Brightness: 8 Daylight & 4 Night Vision
- Battery Type: 2x 18350 Li-ion
- Battery Life: Observation Mode: 10 Hours Full Function Mode: 8 Hours
- IP Rating: IP67
- Window Size: 1.25 x 0.98 in

SKU

DRS-TH



DRS-NIGHT VISION

PRODUCT OVERVIEW

The Holosun DRS-NV (Digital Reflex Sight-Night Vision) sets a new standard for versatility, merging Holosun's cutting-edge red dot sight technology with digital night vision capabilities. A 1024x768 resolution digital night vision sensor offers up to 60fps, giving users unparalleled clarity in low-light areas. The DRS-NV features a Multi-Reticle System (MRS) with multiple reticle options. The internal video recording system, along with on-board storage and USB-C connectivity, empowers users to capture critical moments.



TECHNOLOGY & FEATURES

- Red Dot Sight with Fusion Night Vision Overlay
- Internal Video Recording System
- Refresh Rate: 60FPS Overlay
- Digital Zoom: 1x, 2x, 4x, 8x
- Multi-Reticle System™ (MRS): 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- Night Vision Reticle Options: Cross or T Style
- OLED Sensor Resolution: 1024 x 768 px
- Reticle Brightness: 8 Daylight & 4 Night Vision
- Battery Type: 2x 18350 Li-ion
- Battery Life: Observation Mode: 8 Hours Full Function Mode: 6 Hours
- IP Rating: IP67
- Window Size: 1.25 x 0.98 in

SKU

DRS-NV



SPECIFICATIONS

REFLEX SIGHT DATA		THERMAL DATA		MECHANICAL DATA	
Light Source	LED	MRTD	<50mK	Housing Material	7075 T6 Aluminum
Wavelength	650nm	Lens Focus	25mm	Surface Finish	Anodized
Reticle	2 MOA Dot & 65 MOA Circle	Aperture	F1.1	Housing Color	Black
Selectable Reticle	•	Focus Range	5m-Infinity	Adjustment Per Click	0.5 MOA
Shake Awake Technology	•	Field of View	7.2°x5.3°	W&E Travel Range	±50 MOA
Memory	•	Spectral Range	8-14um	Storage Temperature	-40°C~70°C
No Parallax	•	Sensor Resolution	256x192	Working Temperature	-20°C~50°C
Unlimited Eye Relief	•	OLED Resolution	1024x768	Vibration	1000G
Magnification	1x	Frame Rate	50FPS	PHYSICAL DATA	
Multi-Coatings	•	Video Recording Storage	•	Body Dimensions (in)	3.7x2.2x3.5
		Image Mode	White Hot, Highlight, Edge Detection	Body Weight (oz)	18
		External Charging	5V/1A, Magnetic USB	Central Height Mount (in)	1.72
				Mount Weight (oz)	2.3

SPECIFICATIONS

REFLEX SIGHT DATA		NIGHT VISION DATA		MECHANICAL DATA	
Light Source	LED	Operating Environment (Illuminance)	0.01lx	Housing Material	7075 T6 Aluminum
Wavelength	650nm	Lens Focus	25mm	Surface Finish	Anodized
Reticle	2 MOA Dot & 65 MOA Circle	Aperture	F1.2	Housing Color	Black
Selectable Reticle	•	Focus Range	5m-Infinity	Adjustment Per Click	0.5 MOA
Shake Awake Technology	•	Field of View	7.2°x5.3°	W&E Travel Range	±50 MOA
Memory	•	Spectral Range	400nm-950nm	Storage Temperature	-40°C~70°C
No Parallax	•	Sensor Resolution	1920x1080	Working Temperature	-20°C~50°C
Unlimited Eye Relief	•	OLED Resolution	1024x768	Vibration	1000G
Magnification	1x	Frame Rate	30FPS/60FPS	PHYSICAL DATA	
Multi-Coatings	•	Video Recording Storage	•	Body Dimensions (in)	3.7x2.2x3.5
		Image Mode	Fusion	Body Weight (oz)	18.5
		External Charging	5V/1A, Magnetic USB	Central Height Mount (in)	1.72
				Mount Weight (oz)	2.3



2
ENCLOSED PISTOL SIGHTS

NEW AEMS-MICRO**NEW** AEMS-MACRO**TECHNOLOGY & FEATURES****AEMS-MICRO Features**

- **Window Size (in):** 0.71×0.71
- **Solar Failsafe™ & Shake Awake™**
- **Reticle Brightness:** 8 Daylight & 4 Night Vision
- **Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Forward-facing light sensor photodiode for automatic brightness adjustment

AEMS-MACRO Features

- **Window Size (in):** 0.9×0.9
- **Solar Failsafe™ & Shake Awake™**
- **Reticle Brightness:** 8 Daylight & 4 Night Vision
- Fits standard 509T plate for wide compatibility
- **Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Forward-facing light sensor photodiode for automatic brightness adjustment

SKU

AEMS-MICRO-RD-MRS



AEMS-MACRO-RD-MRS



AEMS-MICRO-GR-MRS



AEMS-MACRO-GR-MRS



AEMS-MICRO-GD-MRS



AEMS-MACRO-GD-MRS



AEMS-MICRO



AEMS-MACRO



AEMS-MICRO



AEMS-MACRO

SPECIFICATIONS

	AEMS-MICRO-RD-MRS	AEMS-MICRO-GR-MRS	AEMS-MICRO-GD-MRS	AEMS-MACRO-RD-MRS	AEMS-MACRO-GR-MRS	AEMS-MACRO-GD-MRS
FUNCTIONS						
Selectable Reticle			•			
Target Light Sensor			•			
Memory			•			
OPTICAL DATA						
Light Source	LED					
Wavelength	650nm	540nm	590nm	650nm	540nm	590nm
No Parallax				•		
Unlimited Eye Relief				•		
Magnification	1×					
Multi-Coatings				•		
ELECTRONIC DATA						
Battery	CR1620			CR1632		
Battery Life (Setting 6)	70,000 Hours (Dot)			100,000 Hours (Dot)		
MECHANICAL DATA						
Housing Material	7075 Aluminum					
Surface Finish	Hard Anodized					
Housing Color	Black					
Adjustment per Click	1 MOA					
W&E Travel Range	±30 MOA					
Storage Temperature	-40°C~70°C					
Working Temperature	-30°C~60°C					
Submersion	IPX8					
Vibration	5000G					
PHYSICAL DATA						
Body Dimensions (in)	1.5×1×1.2			1.62×1.2×1.4		
Body Weight (oz)	2.1			2.5		
Central Body Height (in)	0.63			0.71		



NEW

EPS-CORE

PRODUCT OVERVIEW

The Holosun EPS-CORE redefines compact red-dot performance with an enlarged housing that holds a full-size EPS lens, giving slim pistols a wider, clearer sight picture without extra bulk. Designed around the K-footprint for easy installation, the EPS-CORE is available with Holosun's Multi-Reticle System™ providing a 2MOA dot only, 32MOA Circle only, or a Circle-Dot. A forward-facing light-sensor photodiode automatically adjusts brightness, while Solar Failsafe, Shake Awake, and a side-tray CR1620 battery deliver up to 50,000 hours of runtime. Rugged 6061-T6 aluminum construction and IPX8 sealing keep the view clear and protected.



TECHNOLOGY & FEATURES

- Enlarged EPS lens for a bigger sight picture in a slim RMS footprint housing
- Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Forward-facing light sensor photodiode for automatic brightness response
- Reticle colors available in Red, Green, or Gold
- Manual brightness with lockout and memory function
- Solar Failsafe™ & Shake Awake™**
- Reticle Brightness:** 8 Daylight & 4 Night Vision
- Submersion:** IPX8
- Vibration:** 5000G

SKU

EPS-CORE-RD-MRS	EPS-CORE-RD3
EPS-CORE-GR-MRS	EPS-CORE-GR3
EPS-CORE-GD-MRS	EPS-CORE-GD3

SPECIFICATIONS

	EPS-CORE-RD-SAR	EPS-CORE-GR-SAR	EPS-CORE-GD-SAR	EPS-CORE-RD3	EPS-CORE-RD3	EPS-CORE-RD3	
FUNCTIONS							
Selectable Reticle	•			○			
Solar Power	•			○			
Target Light Sensor		•					
Shake Awake Technology			•				
Memory		•					
OPTICAL DATA							
Light Source	LED						
Wavelength	650nm	540nm	590nm	650nm	540nm	590nm	
Reticle	SAR (Sight Alignment Reticle)		3 MOA Dot				
No Parallax	•						
Unlimited Eye Relief	•						
Magnification	1x						
Multi-Coatings	•						
ELECTRONIC DATA							
Battery	CR1620						
Battery Life (Setting 6)	50,000 Hours (Dot)						
MECHANICAL DATA							
Housing Material	6061 Aluminum						
Surface Finish	Hard Anodized						
Housing Color	Black						
Adjustment per Click	1.5 MOA						
W&E Travel Range	±30 MOA						
Storage Temperature	-40°C-70°C						
Working Temperature	-30°C-60°C						
PHYSICAL DATA							
Window Size (in)	0.90×0.63						
Body Dimensions (in)	1.61×1.18×0.97						
Body Weight (oz)	1.4						
Central Body Height (in)	0.54						



EPS-CARRY

PRODUCT OVERVIEW

The EPS Carry is an enclosed handgun sight designed for single or 1.5 stack handguns. EPS Carry features an aspheric lens for a perfectly clear sight picture and has an ultra-low dot height for compatibility with most factory iron sights. EPS Carry includes a built-in rear notch sight, utilizes Holosun's K footprint, and includes an RMSc-to-K footprint adapter plate for maximum compatibility. EPS Carry is available with a green or red LED in 2MOA, 6MOA, or MRS (Multi-Reticle System). All EPS models feature Shake Awake™ technology and MRS models include Solar Failsafe.



TECHNOLOGY & FEATURES

- Aspherical Glass Lens w/ Zero Distortion
- Shake Awake™ Technology w/ Last Setting Recall
- Solar Failsafe™ (MRS Models Only)
- Includes RMSc-to-K Adapter Plate
- Battery Type:** CR1620
- Reticle Brightness:** 8 Daylight & 4 Night Vision
- Travel Range: ± 30 MOA
- Windage & Elevation Adjustment: 1.5 MOA Per Click
- Housing Material: 7075 T6 Aluminum Housing
- Submersion: IPX8
- Vibration: 5000G
- Window Size: 0.77 x 0.58 in

SKU

EPS-CARRY-RD-MRS	EPS-CARRY-RD2	EPS-CARRY-RD6
EPS-CARRY-GR-MRS	EPS-CARRY-GR2	EPS-CARRY-GR6
EPS-CARRY-GD-MRS	EPS-CARRY-GD2	EPS-CARRY-GD6
NEW		

SPECIFICATIONS

	EPS-CARRY-GR-6	EPS-CARRY-RD-6	EPS-CARRY-GR-2	EPS-CARRY-RD-2	EPS-CARRY-GR-MRS	EPS-CARRY-RD-MRS
FUNCTIONS						
Selectable Reticle	○				●	
Solar Power	○				●	
Shake Awake Technology		●				
Memory		●				
OPTICAL DATA						
Light Source	LED					
Wavelength	540nm	650nm	540nm	650nm	540nm	650nm
Reticle	6 MOA Dot		2 MOA Dot		2 MOA Dot & 32 MOA Circle	
No Parallax		●				
Unlimited Eye Relief		●				
Magnification	1x					
Multi-Coatings	●					
ELECTRONIC DATA						
Battery	CR1620					
Battery Life (Setting 6)	50,000 Hours (Dot)					
Brightness Settings	8 DLT & 4 NV Compatible					
MECHANICAL DATA						
Housing Material	7075 T6 Aluminum					
Surface Finish	Anodized					
Housing Color	Black					
Adjustment per Click	1.5 MOA					
W&E Travel Range	±30 MOA					
Storage Temperature	-40°C~70°C					
Working Temperature	-30°C~60°C					
PHYSICAL DATA						
Window Size (in)	0.77 x 0.58					
Body Dimensions (in)	1.62 x 1.07 x 0.95					
Body Weight (oz)	1.23					



EPS

PRODUCT OVERVIEW

The EPS is a full-sized, enclosed handgun sight featuring an aspheric lens for a perfectly clear sight picture. EPS has an ultra-low dot height for compatibility with most factory iron sights and utilizes Holosun's K footprint. EPS units include an RMR-to-K footprint adapter plate for maximum compatibility. EPS is available with a green or red LED in 2MOA, 6MOA, or MRS (Multi-Reticle System). All EPS models feature Shake Awake™ technology and MRS models include Solar Failsafe™.



TECHNOLOGY & FEATURES

- Aspherical Glass Lens w/ Zero Distortion
- Shake Awake™ Technology w/ Last Setting Recall
- Solar Failsafe™ (MRS Models Only)
- Multi-Reticle System™ (MRS): 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Reticle Options: MRS or 2 MOA Dot or 6 MOA Dot
- Includes RMSc-to-K Adapter Plate
- Travel Range: ± 30 MOA
- Reticle Brightness: 8 Daylight & 4 Night Vision
- Housing Material: 7075 T6 Aluminum Housing
- Windage & Elevation Adjustment: 1.5 MOA Per Click
- IP Rating: IPX8
- Vibration: 5000G

SKU

EPS-RD-MRS	EPS-RD2	EPS-RD6
EPS-GR-MRS	EPS-GR2	EPS-GR6

EPS-GD-MRS	EPS-GD2	EPS-GD6

NEW

SPECIFICATIONS

	EPS-GR-6	EPS-RD-6	EPS-GR-2	EPS-RD-2	EPS-GR-MRS	EPS-RD-MRS
FUNCTIONS						
Selectable Reticle	○				●	
Solar Power	○				●	
Shake Awake Technology		●				
Memory		●				
OPTICAL DATA						
Light Source	LED					
Wavelength	540nm	650nm	540nm	650nm	540nm	650nm
Reticle	6 MOA Dot		2 MOA Dot		2 MOA Dot & 32 MOA Circle	
No Parallax			●			
Unlimited Eye Relief			●			
Magnification			1x			
Multi-Coatings			●			

ELECTRONIC DATA					
Battery					CR1620
Battery Life (Setting 6)					50,000 Hours (Dot)
Brightness Settings					8 DLT & 4 NV Compatible
MECHANICAL DATA					
Housing Material					7075 T6 Aluminum
Surface Finish					Anodized
Housing Color					Black
Adjustment per Click					1.5 MOA
W&E Travel Range					±30 MOA
Storage Temperature					-40°C-70°C
Working Temperature					-30°C-60°C
PHYSICAL DATA					
Window Size (in)					0.90×0.63
Body Dimensions (in)					1.63×1.19×0.99
Body Weight (oz)					1.4

509T

PRODUCT OVERVIEW

The HE509T series are hard-use, enclosed LED sights designed for handgun applications. The HE509T series feature a Grade 5 Titanium Housing, Holosun's Super LED with up to 50k hour battery life, Solar Failsafe, and Shake Awake™ technology. The X2 version adds improved glass clarity, Lock Mode, and our Multi-Reticle System provide a 2MOA dot only, 32MOA Circle only, or a Circle and Dot. HE509T includes an RMR-to-509T Adapter Plate.



TECHNOLOGY & FEATURES

- Shake Awake™ Technology w/ Last Setting Recall
- Solar Failsafe™
- Nitrogen Purged Housing
- Multi-Reticle System™ (MRS): 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Includes RMR-to-509T Adapter Plate
- Travel Range: ± 30 MOA
- Reticle Brightness: 8 Daylight & 4 Night Vision
- Windage & Elevation Adjustment: 1.5 MOA Per Click
- IP Rating: IP67
- Vibration: 5000G

SKU

HE509T-RD-X2
HE509T-GR-X2

HE509T-GD-X2

NEW

SPECIFICATIONS

	HE509T-RD X2	HE509T-GR X2	HE509T-GD X2	ELECTRONIC DATA		
FUNCTIONS						
Selectable Reticle		●		Battery	CR1632	
Solar Power		●		Battery Life (Setting 6)	50,000 Hours (Dot)	
Shake Awake Technology					Brightness Settings	8 DLT & 4 NV Compatible
Memory		●		MECHANICAL DATA		
OPTICAL DATA					Housing Material	Titanium
Light Source	LED				Surface Finish	Anodized
Wavelength	650nm	540nm	570nm	Housing Color		
Reticle	2 MOA Dot & 32 MOA Circle				Adjustment per Click	1 MOA
No Parallax		●		W&E Travel Range		
Unlimited Eye Relief		●		Storage Temperature		
Magnification	1x			Working Temperature		
Multi-Coatings	●			PHYSICAL DATA		
ELECTRONIC DATA					Window Size (in)	0.66×0.9
MECHANICAL DATA					Body Dimensions (in)	1.6×1.16×1.13
Housing Color					Body Weight (oz)	1.27

3 OPEN PISTOL SIGHTS



NEW

507-PROMAX

PRODUCT OVERVIEW

The Holosun 507-PROMAX Series is built for shooters who demand maximum visibility, speed, and durability from a pistol optic. Featuring a significantly enlarged viewing window over the previous 507COMP, the PROMAX delivers an expansive sight picture paired with a forward-leaning sunshade to reduce glare and enhance target clarity. Its upgraded Performance Reticle System (PRS) offers a 2 MOA dot with 8 MOA, 20 MOA, and 32 MOA circle options in Red, Green, or Gold. Refined housing, engraved logo, and RMR-footprint compatibility complete the platform.



TECHNOLOGY & FEATURES

- Enlarged window for a wider, clearer sight picture and faster target transitions
- Forward-leaning sunshade reduces glare and maintains optimal reticle contrast
- Available in Red, Green, and Gold reticle colors
- IP Rating:** IP67
- Vibration:** 5000G
- Brightness Settings:** 8 Daylight & 4 Night Vision Compatible
- Mount Weight (oz):** 2.36

SKU

507-PRO-MAX-RD-PRS

507-PRO-MAX-GR-PRS

507-PRO-MAX-GD-PRS

SPECIFICATIONS

	507-PRO-MAX-RD-PRS	507-PRO-MAX-GR-PRS	507-PRO-MAX-GD-PRS
FUNCTIONS			
Selectable Reticle	•		
Solar Power		•	
Shake Awake Technology		•	
Memory		•	
OPTICAL DATA			
Light Source	LED		
Wavelength	650nm	540nm	570nm
Reticle	PRS		
No Parallax		•	
Unlimited Eye Relief		•	
Magnification	1x		
Multi-Coatings		•	
ELECTRONIC DATA			
Battery	CR1632		
Battery Life (Setting 6)	100,000 Hours (Dot)		
MECHANICAL DATA			
Housing Material	7075 T6 Aluminum		
Surface Finish	Hard Anodized		
Housing Color	Black		
Adjustment per Click	1 MOA		
W&E Travel Range	±30 MOA		
Storage Temperature	-40°C~70°C		
Working Temperature	-30°C~60°C		
PHYSICAL DATA			
Window Size (in)	1.18×0.98		
Body Dimensions (in)	1.8×1.4×1.38		
Body Weight (oz)	1.7		
Central Body Height (in)	0.78		
Central Mount Height (in)	0.94		



NEW

507C-X3

PRODUCT OVERVIEW

The Holosun 507C-X3 reimagines the classic 507C with a modern, refined housing with an engraved Holosun logo. Designed to fit the popular RMR footprint, it offers a clean, low-profile fit on a wide range of full-size pistols. The 507C-X3 features Solar Failsafe and a forward-facing photodiode to automatically manage brightness as light changes in any environment. Choose between a versatile 2 MOA dot or a 32 MOA circle reticle in Red, Green, or Gold for fast target acquisition. Built for everyday carry and range use, the 507C-X3 combines proven simplicity with updated ergonomics and reliable performance.



TECHNOLOGY & FEATURES

- Fits RMR footprint plates for broad pistol compatibility
- **Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- **Solar Failsafe™** and forward-facing photodiode for automatic brightness control
- Low-profile compact form factor optimized for carry and holster use
- Manual brightness with lockout and memory modes
- **Brightness Settings:** 8 Daylight & 4 Night Vision Compatible
- **IP Rating:** IP67
- **Vibration:** 5000G
- **Mount Weight (oz):** 2.36

SKU

507C-X3-RD-MRS



507C-X3-GR-MRS



507C-X3-GD-MRS



SPECIFICATIONS

	507CX3-RD-MRS	507CX3-GR-MRS	507CX3-GD-MRS	
FUNCTIONS				
Selectable Reticle	•			
Solar Power	•			
Target Light Sensor	•			
Shake Awake Technology	•			
Memory	•			
OPTICAL DATA				
Light Source	LED			
Wavelength	650nm	540nm	570nm	
Reticle	2 MOA Dot & 32MOA Circle			
No Parallax	•			
Unlimited Eye Relief	•			
Magnification	1x			
Multi-Coatings	•			
ELECTRONIC DATA				
Battery	CR1632			
Battery Life (Setting 6)	100,000 Hours (Dot)			
Brightness Settings	8 DLt & 4NV Compatible			
MECHANICAL DATA				
Housing Material	7075 T6 Aluminum			
Surface Finish	Hard Anodized			
Housing Color	Black			
Adjustment per Click	1 MOA			
W&E Travel Range	±30 MOA			
Storage Temperature	-40°C-70°C			
Working Temperature	-30°C-60°C			
PHYSICAL DATA				
Window Size (in)	0.91x0.67			
Body Dimensions (in)	1.78x1.31x1.1			
Body Weight (oz)	1.55			
Central Body Height (in)	0.648			
Central Mount Height (in)	0.8			



NEW

407C-X3

PRODUCT OVERVIEW

The Holosun 407C-X3 elevates the original 407C with a modernized, reinforced housing and an engraved Holosun logo for a clean, updated look. Built on the RMR footprint, it provides a low-profile, secure fit across most full-size pistols. The 407C-X3 is available in a 2 MOA dot in Red, Green, or Gold and uses a forward-facing photodiode for automatic brightness control, supported by Solar Failsafe for consistent performance in changing light. With up to 100,000 hours of battery life, Shake Awake technology, and a durable 7075-T6 aluminum body rated IP67 for environmental resistance, the 407C-X3 is designed for dependable everyday carry and range use.



TECHNOLOGY & FEATURES

- Fits RMR footprint plates for broad pistol compatibility
- **Reticle:** 2 MOA Dot
- **Solar Failsafe™** and forward-facing photodiode for automatic brightness control
- Low-profile compact form factor optimized for carry and holster use
- Manual brightness with lockout and memory modes
- **Brightness Settings:** 8 Daylight & 4 Night Vision Compatible
- **IP Rating:** IP67
- **Vibration:** 5000G

SKU

407C-X3-RD



407C-X3-GR



407C-X3-GD



SPECIFICATIONS

	407C-X3-RD	407C-X3-GR	407C-X3-GD
FUNCTIONS			
Target Light Sensor	•		
Shake Awake Technology		•	
Memory		•	
OPTICAL DATA			
Light Source	LED		
Wavelength	650nm	540nm	570nm
Reticle	2 MOA Dot		
No Parallax	•		
Unlimited Eye Relief		•	
Magnification	1x		
Multi-Coatings	•		
ELECTRONIC DATA			
Battery	CR1632		
Battery Life (Setting 6)	100,000 Hours (Dot)		
Brightness Settings	8 DLT & 4NV Compatible		
MECHANICAL DATA			
Housing Material	7075 T6 Aluminum		
Surface Finish	Hard Anodized		
Housing Color	Black		
Adjustment per Click	1 MOA		
W&E Travel Range	±30 MOA		
Storage Temperature	-40°C-70°C		
Working Temperature	-30°C-60°C		
PHYSICAL DATA			
Window Size (in)	0.91x0.67		
Body Dimensions (in)	1.78x1.31x1.1		
Body Weight (oz)	1.55		
Central Body Height (in)	0.648		
Central Mount Height (in)	0.8		



NEW 407COMP

PRODUCT OVERVIEW

The Holosun 407COMP brings the proven performance of the 507COMP to shooters who prefer a simple, high-visibility 6 MOA dot. Built on the same competition-ready housing, it delivers a wide window for fast target acquisition and clear sight tracking in dynamic environments. Available in Red, Green, and Gold reticle options, the 407COMP uses Holosun's Shake Awake, and Lockout features for dependable operation. A side-mounted battery tray allows easy replacement while maintaining zero, and the optic's durable 7075-T6 aluminum housing is designed to withstand the rigors of heavy use. The 407COMP offers clean simplicity with uncompromising speed and precision.



TECHNOLOGY & FEATURES

- Large performance viewing window
- 6 MOA dot in Red, Green, or Gold
- **Shake Awake™ Technology**
- Manual brightness with Lockout and Memory Mode
- Side-tray CR1632 battery
- 7075-T6 aluminum housing with hard-anodized finish
- **Brightness Settings:** 8 Daylight & 2 Night Vision Compatible
- **IP Rating:** IP67
- **Vibration:** 5000G

SKU

HS407COMP-RD



HE407COMP-GR6



HE407COMP-GD6



507COMP

PRODUCT OVERVIEW

The 507COMP handgun sight features a large 1.1" x 0.87" objective lens for enhanced shooting performance and Holosun's new Competition Reticle System (CRS) available with a red or green LED. CRS is an enhanced Multi-Reticle System™ with four components including a precision 2MOA dot, an 8MOA circle, 20MOA circle, and 32MOA circle with multiple combination settings to suit individual shooter's preference.



TECHNOLOGY & FEATURES

- **Competition Reticle System (CRS):** 2 MOA Dot with 8/20/32 MOA Circle
- Up to 50,000 Hour Battery Life
- **Shake Awake™ Technology w/ Last Setting Recall**
- Enlarged Window for Enhanced Field Of View
- Parallax Free & Unlimited Eye Relief
- **IP Rating:** IP67
- **Travel Range:** ± 30 MOA
- **Reticle Brightness:** 8 Daylight & 2 Night Vision
- **Windage & Elevation Adjustment:** 1 MOA Per Click
- **Window Size:** 1.1 × 0.87 in
- **Housing Material:** 7075 T6 Aluminum

SKU

HS507COMP-RD



HE507COMP-GR



HE507COMP-GD



NEW

SPECIFICATIONS

	HS407COMP-RD	HE407COMP-GR	HE407COMP-GD6
FUNCTIONS			
Selectable Reticle	•		
Shake Awake Technology	•		
Memory	•		
OPTICAL DATA			
Light Source	LED		
Wavelength	650nm	540nm	570nm
Reticle	6 MOA Dot		
No Parallax	•		
Unlimited Eye Relief	•		
Magnification	1×		
Multi-Coatings	•		

ELECTRONIC DATA		
Battery	CR1632	
Battery Life (Setting 6)	50,000 Hours	
Brightness Settings	8 DLt & 2 NV Compatible	
MECHANICAL DATA		
Housing Material	7075 Aluminum	
Surface Finish	Anodized	
Housing Color	Black	
Adjustment per Click	1 MOA	
W&E Travel Range	±30 MOA	
Storage Temperature	-40°C-70°C	
Working Temperature	-30°C-60°C	
PHYSICAL DATA		
Window Size (in)	1.1×0.87	
Body Dimensions (in)	1.8×1.3×1.3	
Body Weight (oz)	1.7	
Central Body Height (in)	0.717	

SPECIFICATIONS

	HS507COMP-RD	HE507COMP-GR	HS507COMP-GD
FUNCTIONS			
Selectable Reticle		•	
Solar Power		○	
Shake Awake Technology		•	
Memory		•	
OPTICAL DATA			
Light Source	LED		
Wavelength	650nm	540nm	570nm
Reticle	2 MOA Dot & 8/20/32 MOA Circle		
No Parallax	•		
Unlimited Eye Relief	•		
Magnification	1×		
Multi-Coatings	•		
ELECTRONIC DATA			
Battery	CR1632		
Battery Life (Setting 6)	50,000 Hours (Dot)		
MECHANICAL DATA			
Housing Material	7075 T6 Titanium		
Surface Finish	Anodized		
Housing Color	Black		
Adjustment per Click	1 MOA		
W&E Travel Range	±30 MOA		
Storage Temperature	-40°C-70°C		
Working Temperature	-30°C-60°C		
Submersion	IP67		
Vibration	5000G		
PHYSICAL DATA			
Window Size (in)	1.1×0.87		
Body Dimensions (in)	1.8×1.3×1.3		
Body Weight (oz)	1.7		

508T

PRODUCT OVERVIEW

The 508T X2 series are open reflex sights designed for handgun applications. Features include a grade 5 titanium housing with industry standard footprint, Holosun's Super LED with up to 50k hour battery life, Multi-Reticle System™ providing 2MOA dot only, 32MOA Circle only, or Circle-Dot. 508T X2 also features Solar Failsafe™, Shake Awake™, and Lock Mode which, when activated, can prevent inadvertent setting changes.



TECHNOLOGY & FEATURES

- Up to 50,000 Hour Battery Life
- Shake Awake™** Technology w/ Last Setting Recall
- Parallax Free & Unlimited Eye Relief
- Solar Failsafe™**
- Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Battery Type:** CR1632

- IP Rating:** IP67
- Travel Range:** ± 50 MOA
- Reticle Brightness:** 8 Daylight & 4 Night Vision
- Windage & Elevation Adjustment:** 1 MOA Per Click
- Window Size:** 0.91 x 0.63 in
- Housing Material:** Grade 5 Titanium

SKU

HE508T-RD-X2



HE508T-GR-X2



SPECIFICATIONS

	HE508T-RD X2	HE508T-GR X2	MECHANICAL DATA
FUNCTIONS			
Selectable Reticle	•		
Solar Power	•		
Shake Awake Technology	•		
Memory	•		
OPTICAL DATA			
Light Source	LED		
Wavelength	650nm	540nm	
Reticle	2 MOA Dot & 32 MOA Circle		
No Parallax	•		
Unlimited Eye Relief	•		
Magnification	1x		
Multi-Coatings	•		
ELECTRONIC DATA			
Battery	CR1632		
Battery Life (Setting 6)	50,000 Hours		
			PHYSICAL DATA
			Window Size (in)
			0.63x0.91
			Body Dimensions (in)
			1.78x1.15x1.15
			Body Weight (oz)
			2

507K-X2**407K-X2****TECHNOLOGY & FEATURES**

- Up to a 50,000 Hour Battery life
- Shake Awake™ Technology** with Last Setting Recall
- Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle (HE/ HS507K)
- 6 MOA Reticle (HE407K/HS407K)
- Parallax Free & Unlimited Eye Relief
- Travel Range:** ± 30 MOA
- Reticle Brightness:** 10 Daylight & 2 Night Vision Compatible Settings
- Windage & Elevation Adjustment:** 1 MOA Per Click
- Window Size:** 0.58 x 0.77 in
- Housing Material:** 7075 T6 Aluminum

SKU

HS507K-X2	HE507K-GR-X2

HS407K-X2	HE407K-GR-X2

SPECIFICATIONS

	HS507K-X2	HE507K-GR-X2	HS407K-X2	HE407K-GR-X2	
FUNCTIONS					
Selectable Reticle	•	○			
Solar Power		○			
Shake Awake Technology		•			
Memory		•			
OPTICAL DATA					
Light Source	LED				
Wavelength	650nm	540nm	650nm	540nm	
Reticle	2 MOA Dot & 32 MOA Circle		6 MOA Dot		
No Parallax		•			
Unlimited Eye Relief		•			
Magnification		1x			
Multi-Coatings		•			
ELECTRONIC DATA					
Battery	CR1632				
Battery Life (Setting 6)	50,000 Hours (Dot)		50,000 Hours		
Brightness Settings	10 DLT & 2 NV Compatible				
MECHANICAL DATA					
Housing Material	7075 T6 Titanium				
Surface Finish	Anodized				
Housing Color	Black				
Adjustment per Click	1 MOA				
W&E Travel Range	± 30 MOA				
Storage Temperature	-40°C~70°C				
Working Temperature	-30°C~60°C				
Submersion	IP67				
Vibration	5000G				
PHYSICAL DATA					
Window Size (in)	0.58x0.77				
Body Dimensions (in)	1.6x0.98x0.95				
Body Weight (oz)	1				





SOLAR CHARGING SIGHTS

SCS-CARRY**SCS-320****TECHNOLOGY & FEATURES**

- SCS-CARRY:** Direct Fit For Holosun K Footprint, Includes RMSc-to-K Adapter Plate
- SCS-320:** Direct Fit For Sig Sauer Optics-Ready P320 Handguns & DPP Footprint
- Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Aspheric Glass Lens w/ Zero Distortion
- Solar Charging Internal Battery
- Multi-Sensor Auto Brightness
- Brightness Intensity Override System

SKU

SCS-CARRY-GR



SCS-320-GR

**SPECIFICATIONS**

FUNCTIONS	
Selectable Reticle	•
Solar Power	•
OPTICAL DATA	
Light Source	LED
Wavelength	540nm
Reticle	2 MOA Dot & 32 MOA Circle
No Parallax	•
Unlimited Eye Relief	•
Magnification	1x
Multi-Coatings	•
ELECTRONIC DATA	
Battery	Internal Rechargeable Battery
Battery Life (Setting 6)	20,000 Hours
Brightness Settings	Auto

	SCS-CARRY-GR	SCS-320-GR
MECHANICAL DATA		
Housing Material	7075 T6 Aluminum	
Surface Finish	Anodized	
Housing Color		
Adjustment per Click	1.5 MOA	
W&E Travel Range		
Storage Temperature	-40°C~70°C	
Working Temperature		
Submersion	IPX8	
Vibration		
PHYSICAL DATA		
Window Size (in)	0.77×0.58	0.90×0.63
Body Dimensions (in)	1.6×1×0.95	1.85×1.15×1.06
Body Weight (oz)	1.06	1.35



SCS-MOS**SCS-MP2****TECHNOLOGY & FEATURES**

- Aspheric Glass Lens w/ Zero Distortion
- Solar Charging Internal Battery
- Multi-Sensor Auto Brightness
- Brightness Intensity Override System
- Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Travel Range: ± 30 MOA
- Windage & Elevation Adjustment: 1 MOA Per Click
- Power Reserve: 20,000-Hours
- IP Rating: IP67

SKU

SCS-MOS-GR



SCS-MP2-GR

**SPECIFICATIONS**

FUNCTIONS	
Selectable Reticle	•
Solar Power	•
OPTICAL DATA	
Light Source	LED
Wavelength	540nm
Reticle	2 MOA Dot & 32 MOA Circle
No Parallax	•
Unlimited Eye Relief	•
Magnification	1x
Multi-Coatings	•
ELECTRONIC DATA	
Battery	Internal Rechargeable Battery
Battery Life (Setting 6)	20,000 Hours
Brightness Settings	Auto

	SCS-M-GR	SCS-MP2-GR
MECHANICAL DATA		
Housing Material	7075 T6 Aluminum	
Surface Finish	Anodized	
Housing Color	Black	
Adjustment per Click	1 MOA	
W&E Travel Range	±50 MOA	±30 MOA
Storage Temperature	-40°C~70°C	
Working Temperature	-30°C~60°C	
Submersion	IP67	
Vibration	5000G	
PHYSICAL DATA		
Window Size (in)	0.77×0.58	0.90×0.63
Body Dimensions (in)	1.93×1.03×0.91	2×1.05×0.95
Body Weight (oz)	1.3	1.35



SCS-P10**SCS-VP9****SCS-PDP****TECHNOLOGY & FEATURES**

- SCS-P10:** Direct Fit For CZ® P10 Handguns
- SCS-VP9:** Direct Fit For HK® VP9™ Handguns
- Aspheric Glass Lens w/ Zero Distortion
- Solar Charging Internal Battery
- Multi-Sensor Auto Brightness
- Brightness Intensity Override System
- Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Travel Range:** ± 30 MOA
- Power Reserve:** 20,000-Hours
- Housing Material:** 7075 T6 Aluminum

SKU

SCS-P10-GR



SCS-VP9-GR

**TECHNOLOGY & FEATURES**

- Direct Fit For Walther® PDP 2.0 Handguns
- Aspheric Glass Lens w/ Zero Distortion
- Solar Charging Internal Battery
- Multi-Sensor Auto Brightness
- Brightness Intensity Override System
- Multi-Reticle System™ (MRS):** 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle
- Travel Range:** ± 30 MOA
- Power Reserve:** 20,000-Hours
- Housing Material:** 7075 T6 Aluminum

SKU

SCS-PDP-GR

**SPECIFICATIONS**

FUNCTIONS	
Selectable Reticle	•
Solar Power	•
OPTICAL DATA	
Light Source	LED
Wavelength	540nm
Reticle	2 MOA Dot & 32 MOA Circle
No Parallax	•
Unlimited Eye Relief	•
Magnification	1x
Multi-Coatings	•
ELECTRONIC DATA	
Battery	Internal Rechargeable Battery
Battery Life (Setting 6)	20,000 Hours
Brightness Settings	Auto

	SCS-P10-GR	SCS-VP9-GR
MECHANICAL DATA		
Housing Material	7075 T6 Aluminum	
OPTICAL DATA		
Surface Finish	Anodized	
Housing Color	Black	
Adjustment per Click	1 MOA	
W&E Travel Range	±30 MOA	
Storage Temperature	-40°C~70°C	
Working Temperature	-30°C~60°C	
Submersion	IP67	
Vibration	5000G	
PHYSICAL DATA		
Window Size (in)	0.77x0.58	
Body Dimensions (in)	2x1.05x0.95	
Body Weight (oz)	1.25	1.35

SPECIFICATIONS

FUNCTIONS	
Selectable Reticle	•
Solar Power	•
OPTICAL DATA	
Light Source	LED
Wavelength	540nm
Reticle	2 MOA Dot & 32 MOA Circle
No Parallax	•
Unlimited Eye Relief	•
Magnification	1x
Multi-Coatings	•
ELECTRONIC DATA	
Battery	Internal Rechargeable Battery
Battery Life (Setting 6)	20,000 Hours
Brightness Settings	Auto
MECHANICAL DATA	
Housing Material	7075 T6 Aluminum
Surface Finish	Anodized
Housing Color	Black
Adjustment per Click	1 MOA
W&E Travel Range	±30 MOA
Storage Temperature	-40°C~70°C
Working Temperature	-30°C~60°C
Submersion	IP67
Vibration	5000G
PHYSICAL DATA	
Window Size (in)	0.77x0.58
Body Dimensions (in)	2x1.05x0.95
Body Weight (oz)	1.35

SCRS

PRODUCT OVERVIEW

The SCRS (Solar Charging Rifle Sight) advances Holosun's SCS technology creating an all-new, ultra compact 20mm tube sight designed for rifle applications. The SCRS features multi-directional light sensors with an advanced Auto Mode for automatic reticle intensity adjustments and a Manual Mode for precise dot brightness control. SCRS is made from 7075 aluminum and utilizes Holosun's 509T footprint for compatibility with third-party offset RDS mounts. SCRS is available with a 2MOA dot or MRS (Multi-Reticle System) in Red or Green models.



TECHNOLOGY & FEATURES

- Solar Charging Internal Battery
- Multi-Sensor Auto Brightness
- Brightness Intensity Override System
- Parallax Free & Unlimited Eye Relief
- Holosun 509T Footprint
- **Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- **Battery Life:** 20,000-Hours
- **Reticle Brightness:** 8 Daylight & 4 Night Vision
- **Travel Range:** ± 50 MOA
- **Windage & Elevation Adjustment:** 1 MOA Per Click

SKU

SCRS-MRS-RD	SCRS-RD-2
SCRS-MRS-GR	SCRS-GR-2

SPECIFICATIONS

	SCRS-GR-2	SCRS-RD-2	SCRS-GR-MRS	SCRS-RD-MRS	
FUNCTIONS					
Selectable Reticle	○		●		
Solar Power		●			
Shake Awake Technology		●			
Memory		●			
OPTICAL DATA					
Light Source	LED				
Wavelength	540nm	650nm	540nm	650nm	
Reticle	2 MOA Dot		2 MOA Dot & 65 MOA Circle		
No Parallax		●			
Unlimited Eye Relief		●			
Magnification	1x				
Multi-Coatings		●			
ELECTRONIC DATA					
Battery	Internal Rechargeable Battery				
Brightness Settings	8 DLT & 4 NV Compatible				
MECHANICAL DATA					
Housing Material	7075 T6 Aluminum				
Surface Finish	Anodized				
Housing Color	Black				
Adjustment per Click	1 MOA				
W&E Travel Range	±50 MOA				
Storage Temperature	-40°C~70°C				
Working Temperature	-30°C~60°C				
Submersion	IP67				
Vibration	1000G				
PHYSICAL DATA					
Window Size (in)	0.86 Diameter				
Body Dimensions (in)	1.7x1.35x1.6				
Body Weight (oz)	2.45				



A soldier in full combat gear, including a helmet and night vision goggles, is shown from the chest up, holding a rifle. The rifle is equipped with various attachments, including a scope, a red dot sight, and a green laser sight. The background is dark.

5 RIFLE SIGHTS

NEW AEMS-EVO-DUAL

PRODUCT OVERVIEW

The Holosun AEMS-EVO-DUAL elevates red dot performance with fully integrated visible and IR lasers built into a compact 7075-T6 aluminum housing. Its Solar Failsafe, Shake Awake, and selectable 2 MOA dot or 65 MOA circle reticle ensure rapid adaptation to any lighting environment, day or night. A side-loaded CR123A powers up to 50,000 hours of runtime, while the large viewing window delivers fast, unobstructed target acquisition. Rated IPX8 for durability and optimized for night vision compatibility, the AEMS-EVO-DUAL provides dependable precision and control in any shooting scenario.



TECHNOLOGY & FEATURES

- Integrated Visible Green & IR Lasers
- 1.26" Wide Viewing Window for Enhanced FOV
- **Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- **Solar Failsafe™ & Shake Awake™**
- **Battery Life:** Dot: 300,000 Hours, Green laser: 12 Hours, IR Laser: 50 Hours
- **IR Pointer Class:** 1
- **Green Laser Wavelength (nm):** 520
- **IR Laser Wavelength (nm):** 850
- **IR Pointer Output Power (mW):** <0.7
- **Submersion:** IPX8
- **Vibration:** 1000G
- **Central Mount Height (in):** 1.63

SKU



SPECIFICATIONS

FUNCTIONS		ELECTRONIC DATA	
Selectable Reticle	•	Battery	CR123A
Target Light Sensor		Brightness Settings	
Memory	•	8DLt & 4NV Compatible	
Green Laser Pointer	•	MECHANICAL DATA	
IR Laser Pointer	•	Housing Material	7075 Aluminum
OPTICAL DATA		Surface Finish	Hard Anodized
Light Source	LED	Housing Color	Black
Wavelength	650nm	Adjustment per Click	0.5 MOA
No Parallax	•	W&E Travel Range	±50 MOA
Unlimited Eye Relief	•	Storage Temperature	-40°C~70°C
Magnification	1x	Working Temperature	-30°C~60°C
PHYSICAL DATA			
Multi-Coatings	•	Window Size (in)	1.26x0.98
Green Laser Output Power (mW)	<5	Body Dimensions (in)	3.03x2x2.68
Green Laser Class	3R	Body Weight (oz)	10.6



NEW

ARO-EVO-DUAL

PRODUCT OVERVIEW

The Holosun ARO-EVO-DUAL combines red-dot precision with built-in visible and infrared lasers for a compact, all-in-one solution ready for any range or environment. Its durable 6061-T6 aluminum housing features a wide 26 mm viewing window, Solar Failsafe, Shake Awake, and a selectable 2 MOA Dot and 65 MOA Circle reticle for adaptable performance. The included dual-lead remote switch allows quick activation through a standard Crane plug, giving users simple and reliable control. With a 50,000-hour front-mounted battery and IPX8 waterproof rating, the ARO-EVO-DUAL delivers confidence and capability from daylight practice to low-light conditions.



TECHNOLOGY & FEATURES

- Integrated Visible Green & IR Lasers
- Dual-Button Remote Switch with Crane Plug
- Internal Cable Routing System
- **Solar Failsafe™ & Shake Awake™**
- **Multi-Reticle System™ (MRS)**: 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- **Battery Life**; Dot: 300,000 Hours, Green laser: 12 Hours, IR Laser: 50 Hours
- **IR Pointer Class**: 1
- **IR Pointer Output Power (mW)**: <0.7
- **Green Laser Wavelength (nm)**: 520
- **IR Laser Wavelength (nm)**: 850
- **Submersion**: IPX8
- **Vibration**: 1000G
- **Central Body Height (in)**: 0.918
- **Central Mount Height (in)**: 1.63
- **Mount Weight (oz)**: 1.73

SKU



SPECIFICATIONS

FUNCTIONS		ELECTRONIC DATA	
Selectable Reticle	•	Battery	CR123A
Solar Power	•	Brightness Settings	8DLt & 4NV Compatible
Target Light Sensor	•	MECHANICAL DATA	
Shake Awake Technology	•	Housing Material	6061 Aluminum
Memory	•	Surface Finish	Hard Anodized
OPTICAL DATA		Housing Color	Black
Light Source	LED	Adjustment per Click	0.5 MOA
Wavelength	650nm	W&E Travel Range	±50 MOA
No Parallax	•	Storage Temperature	-40°C-70°C
Unlimited Eye Relief	•	Working Temperature	-30°C-60°C
Magnification	1x	PHYSICAL DATA	
Multi-Coatings	•	Window Size (in)	1.02 Diameter
Green Laser Output Power (mW)	<5	Body Dimensions (in)	2.85x2.08x2.74
Green Laser Class	3R	Body Weight (oz)	7.76

NEW

AEMS-EVO

PRODUCT OVERVIEW

The Holosun AEMS-EVO builds on the proven AEMS platform with a larger viewing window, refined housing, and a new forward-facing light sensor that automatically adjusts brightness for changing environments. Available in Red, Green, or Gold reticle options, it features a selectable 2 MOA Dot and 65 MOA Circle, Solar Failsafe, and Shake Awake technology. A side-loading CR2032 battery delivers up to 100,000 hours of runtime, while the compact 7075-T6 aluminum body and IP67 waterproof rating ensure long-lasting durability. The AEMS-EVO delivers a brighter, wider, and smarter red dot experience for everyday shooters and professionals alike.



TECHNOLOGY & FEATURES

- Larger 1.26" x 0.98" Viewing Window
- Forward-Facing Light Sensor for Automatic Brightness Adjustment
- Available in Red, Green, or Gold Reticle Options
- **Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- **Solar Failsafe™ & Shake Awake™**
- **Battery Life (Setting 6):** 100,000 Hours
- **Submersion:** IPX8
- **Vibration:** 1000G
- **Central Body Height (in):** 1.08
- **Central Mount Height (in):** 1.63
- **Mount Weight (oz):** 2.45

SKU

AEMS-EVO-RD



AEMS-EVO-GR



AEMS-EVO-GD



SPECIFICATIONS

FUNCTIONS		ELECTRONIC DATA			MECHANICAL DATA		OPTICAL DATA		PHYSICAL DATA		
Selectable Reticle	•				Battery	CR2032			Window Size (in)	1.26x0.98	
Solar Power	•				Brightness Settings	8DLt & 4NV Compatible			Body Dimensions (in)	2.68x1.77x2.6	
Target Light Sensor	•				Housing Material	7075 Aluminum			Body Weight (oz)	8.15	
Shake Awake Technology	•				Surface Finish	Hard Anodized					
Memory	•				Housing Color	Black					
OPTICAL DATA		PHYSICAL DATA			Adjustment per Click	0.5 MOA					
Light Source	LED				W&E Travel Range	±50 MOA					
Wavelength	650nm	540nm	590nm		Storage Temperature	-40°C-70°C					
Reticle	2 MOA Dot & 65 MOA Circle				Working Temperature	-30°C-60°C					
No Parallax	•										
Unlimited Eye Relief	•										
Magnification	1x										
Multi-Coatings	•										



ARO-CORE

PRODUCT OVERVIEW

The Holosun ARO-CORE (Advanced Rifle Optic) represents the latest evolution of Holosun's renowned 403 and 503 Models, offering a perfect balance of performance, reliability, and affordability. Designed with shooters in mind, the ARO-CORE features a refined 22mm optical window for enhanced visibility with a crisp 2 MOA dot or Holosun's innovative Multi-Reticle System (MRS), providing an optimal sight picture in a compact and lightweight design. Equipped with Shake Awake™ technology, this optic automatically activates when it detects motion and conserves battery life when idle with auto-off. The side-loading CR2032 battery tray ensures easy battery replacement, while the manual brightness controls offer flexibility with 10 daylight and 2 night-vision compatible settings.



TECHNOLOGY & FEATURES

- Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- Shake Awake™ Technology** with Last Setting Recall
- Reticle Options:** MRS or 2 MOA Dot
- Battery Type:** CR2032
- Up to 50,000 Hour Battery Life
- Travel Range:** ± 50 MOA
- Brightness Settings:** 10 Daylight & 2 Night Vision
- Housing Material:** Aluminum
- IP Rating:** IP67
- Vibration:** 1000G
- Window Size:** 0.866 in

SKU

ARO-CORE-MRS-RD	ARO-CORE-RD2
ARO-CORE-MRS-GR	ARO-CORE-GR2
ARO-CORE-MRS-GD	ARO-CORE-GD2

SPECIFICATIONS

	ARO-CORE-RD2	ARO-CORE-GR2	ARO-CORE-GD2	ARO-CORE-MRS-RD	ARO-CORE-MRS-GR	ARO-CORE-MRS-GD	
FUNCTIONS							
Selectable Reticle	○			●			
Shake Awake Technology		●					
Memory		●					
OPTICAL DATA							
Light Source	LED						
Wavelength	650nm	540nm	570nm	650nm	540nm	570nm	
Reticle	2 MOA Dot		2 MOA Dot & 65 MOA Circle				
No Parallax		●					
Unlimited Eye Relief		●					
Magnification	1x						
Multi-Coatings		●					
ELECTRONIC DATA							
Battery	CR2032						
Battery Life (Setting 6)	50,000 Hours						

	MECHANICAL DATA					
Housing Material	Aluminum					
Surface Finish	MAO					
Housing Color	Black					
Adjustment per Click	0.5 MOA					
W&E Travel Range	±50 MOA					
Storage Temperature	-40°C-70°C					
Working Temperature	-30°C-60°C					
	PHYSICAL DATA					
Window Size (in)	0.866 Diameter					
Body Dimensions (in)	2.48×1.54×2.63					
Body Weight (oz)	3.38					
Central Mount Height (in)	1.63					
Mount Weight (oz)	1.73					

ARO-EVO

PRODUCT OVERVIEW

ARO-EVO is the ARO (Advanced Rifle Optic) EVOlved. ARO-EVO features an all-new 26mm housing design that offers a larger sight picture providing the user with more information for improved performance shooting along with our new lower 1/3 co-witness pedestal mount. The newly designed housing mates perfectly with our magnifier series and includes a new lens cap and anti-reflection device system. Additionally, ARO-EVO is available with our new Special Purpose Reticle (SPR) which is a bullet-drop compensating and ranging reticle which balances the performance of a 2MOA dot with accuracy at intermediate distances. ARO-EVO is available with our Special Purpose Reticle or a 2MOA dot only in Red, Green, and Gold.



TECHNOLOGY & FEATURES

- Shake Awake™ Technology** with Last Setting Recall
- Solar Failsafe™**
- Reticle Options:** SPR Reticle System (1.5 MOA dot, 3x 1 MOA holdovers, 65 MOA circle, and Ranging Reticle); or 2 MOA Dot
- Battery Type:** CR2032
- Travel Range:** ± 50 MOA
- Brightness Settings:** 8 Daylight & 4 Night Vision
- Windage & Elevation Adjustment:** 0.5 MOA Per Click
- IP Rating:** IPX8
- Vibration:** 1000G
- Window Size:** 1.02 in

*Lens Cap and Anti-Reflection Device Sold Separately

SKU

ARO-EVO-SPR-RD	ARO-EVO-RD2
ARO-EVO-SPR-GR	ARO-EVO-GR2
ARO-EVO-SPR-GD	ARO-EVO-GD2

SPECIFICATIONS

	ARO-EVO-RD2	ARO-EVO-GR2	ARO-EVO-GD2	ARO-EVO-SPR-RD	ARO-EVO-SPR-GR	ARO-EVO-SPR-GD
FUNCTIONS						
Selectable Reticle	○			●		
Solar Power		○			●	
Shake Awake Technology			●			
Memory				●		
OPTICAL DATA						
Light Source	LED					
Wavelength	650nm	540nm	570nm	650nm	540nm	570nm
No Parallax			●			
Unlimited Eye Relief			●			
Magnification	1x					
Multi-Coatings				●		
PHYSICAL DATA						
Window Size (in)	1.02 Diameter					
Body Dimensions (in)	2.87×1.68×2.7					
Body Weight (oz)	4.3					
Central Mount Height (in)	1.63					
Mount Weight (oz)	1.7					
ELECTRONIC DATA						
Battery	CR2032					
Battery Life (Setting 6)	50,000 Hours					

AEMS-PRO-X2

PRODUCT OVERVIEW

The Holosun AEMS-PRO-X2 is the next evolution of the AEMS platform, offering cutting-edge features designed for superior accuracy and performance in any environment. With an advanced optical system that reduces parallax by 50%, the AEMS-PRO-X2 ensures precise and reliable targeting, making it an ideal choice for tactical professionals and competitive shooters alike. This optic introduces a forward-facing light sensor, enabling a smarter AUTO Mode that adjusts the brightness to improve dot contrast in dynamic lighting conditions. Whether in bright sunlight or low-light scenarios, the AEMS-PRO-X2 will provide optimal visibility to enhance target acquisition and shot placement.



TECHNOLOGY & FEATURES

- Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- Travel Range:** ± 50 MOA
- Submersion:** IP67
- Vibration:** 1000G
- Window Size:** 1.1 x 0.87 in
- Housing Material:** 7075 T6 Aluminum
- Flip Down Protective Lens Covers**
- Shake Awake™ Technology with Last Setting Recall**
- Solar FailSafe™**
- Brightness Settings:** 8 Daylight & 4 Night Vision

SKU

AEMS-PRO-X2-RD



AEMS-PRO-X2-GR



AEMS-PRO-X2-GD



SPECIFICATIONS

	AEMS-PRO-X2-RD	AEMS-PRO-X2-GR	AEMS-PRO-X2-GD
FUNCTIONS			
Selectable Reticle	•		
Solar Power		•	
Shake Awake Technology	•		
Memory	•		
OPTICAL DATA			
Light Source	LED		
Wavelength	650nm	540nm	570nm
Reticle	2 MOA Dot & 65 MOA Circle		
No Parallax	•		
Unlimited Eye Relief	•		
Magnification	1x		
Multi-Coatings	•		
ELECTRONIC DATA			
Battery	CR2032		
Battery Life (Setting 6)	50,000 Hours		

	MECHANICAL DATA		
Housing Material	7075 T6 Titanium		
Surface Finish	Hard Anodized		
Housing Color	Black		
Adjustment per Click	0.5 MOA		
W&E Travel Range	±50 MOA		
Storage Temperature	-40°C-70°C		
Working Temperature	-30°C-60°C		
	PHYSICAL DATA		
Window Size (in)	1.1x0.87		
Body Dimensions (in)	2.2x1.76x2.52		
Body Weight (oz)	4.3		
Central Mount Height (in)	1.63		
Mount Weight (oz)	6.1		

AEMS-CORE-X2

PRODUCT OVERVIEW

The Holosun AEMS-CORE-X2 is a high-performance reflex sight built on the reliable AEMS platform, now enhanced with an advanced optical system that reduces parallax by 50%. This cutting-edge technology improves aiming accuracy, making it a top choice for tactical, competitive, and recreational shooters who demand precision. The AEMS-CORE also features a green LED reticle for enhanced clarity in bright conditions, making it easier to acquire and track targets.



TECHNOLOGY & FEATURES

- Up to a 50,000 Hour Battery Life**
- Travel Range:** ± 50 MOA
- Shake Awake™ Technology with Last Setting Recall**
- Reticle:** 2 MOA Dot
- Battery Type:** CR2032
- Brightness Settings:** 10 Daylight & 2 Night Vision
- Windage & Elevation Adjustment:** 0.5 MOA Per Click
- Submersion:** IP67
- Vibration:** 1000G
- Window Size:** 1.1 x 0.87 in

SKU

AEMS-CORE-X2-RD



AEMS-CORE-X2-GR



AEMS-CORE-X2-GD



SPECIFICATIONS

	AEMS-CORE-X2-RD	AEMS-CORE-X2-GR	AEMS-CORE-X2-GD	MECHANICAL DATA
FUNCTIONS				
Shake Awake Technology		•		
Memory			•	
OPTICAL DATA				
Light Source	LED			
Wavelength	650nm	540nm	570nm	
Reticle	2 MOA Dot			
No Parallax		•		
Unlimited Eye Relief		•		
Magnification	1x			
Multi-Coatings		•		
ELECTRONIC DATA				
Battery	CR2032			
Battery Life (Setting 6)	50,000 Hours			
PHYSICAL DATA				
Housing Material	7075 T6 Titanium			
Surface Finish	MAO			
Housing Color	Black			
Adjustment per Click	0.5 MOA			
W&E Travel Range	±50 MOA			
Storage Temperature	-40°C-70°C			
Working Temperature	-30°C-60°C			

HS510C



HE510C



TECHNOLOGY & FEATURES

- **Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- **Shake Awake™ Technology** with Last Setting Recall
- Parallax Free & Unlimited Eye Relief
- HS510C Available in FDE & 510C + HM3X Combo
- Up to a 50,000 Hour Battery life
- **Housing Material:** Aluminum & Titanium Hood
- **Brightness Settings:** 10 Daylight & 2 Night Vision
- **Submersion:** IP67
- **Vibration:** 1000G

SKU

HS510C



HE510C-GR



SPECIFICATIONS

	HS510C	HE510C-GR	MECHANICAL DATA
FUNCTIONS			
Solar Power	•		Surface Finish
Shake Awake Technology	•		Housing Color
Memory	•		Adjustment per Click
OPTICAL DATA			W&E Travel Range
Light Source	LED		65 MOA
Wavelength	650nm	540nm	-40°C-70°C
No Parallax	•		Storage Temperature
Unlimited Eye Relief	•		Working Temperature
Magnification	1x		PHYSICAL DATA
Multi-Coatings	•		Window Size (in)
ELECTRONIC DATA			0.91x1.26
Battery	CR2032		Body Dimensions (in)
Battery Life (Setting 6)	50,000 Hours		3.3x1.68x1.78
			Body Weight (oz)
			4.94
			Central Mount Height (in)
			1.41
			Mount Weight (oz)
			7.6

HE530C



HE530G



TECHNOLOGY & FEATURES

- **Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- **Solar FailSafe™ (HE530C)**
- **Travel Range:** ± 50 MOA
- **Brightness Settings:** 10 Daylight & 2 Night Vision
- **Windage & Elevation Adjustment:** 0.5 MOA Per Click
- **Window Size:** 30mm Diameter
- **Housing Material:** Grade 5 Titanium
- **Submersion:** IPX8
- **Vibration:** 1000G

SKU

HE530C-RD



HE530G-RD



HE530C-GR



HE530G-GR



SPECIFICATIONS

	HE530C-RD	HE530C-GR	HE530G-RD	HE530G-GR	MECHANICAL DATA
FUNCTIONS					Surface Finish
Solar Power	•			○	Titanium Finish
Shake Awake Technology			•		Housing Color
Memory			•		Adjustment per Click
OPTICAL DATA					W&E Travel Range
Light Source					65 MOA
Wavelength	650nm	540nm	650nm	540nm	-40°C-70°C
No Parallax					Storage Temperature
Unlimited Eye Relief					Working Temperature
Magnification					PHYSICAL DATA
Multi-Coatings					Window Size (in)
ELECTRONIC DATA					30mm Diameter
Battery					Body Dimensions (in)
Battery Life (Setting 6)					3.22x1.65x1.87
					Body Weight (oz)
					6.77
					Central Mount Height (in)
					1.41
					Mount Weight (oz)
					9.4

HE515CM



HE515GM



HE515GT



HE515CT



PRODUCT OVERVIEW

- Multi-Reticle System™ (MRS):** 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- Shake Awake™ Technology** with Last Setting Recall
- Solar FailSafe™** (HE515CM/HS515CM, HE515CT)
- Up to a 50,000 Hour Battery life
- Parallax Free & Unlimited Eye Relief
- Central Mount Height (in):** 1.63

SKU

HS515CM		HE515CM-GR	
HS515GM		HE515GM-GR	

PRODUCT OVERVIEW

- IP Rating:** IPX8
- Travel Range:** ± 50 MOA
- Reticle Brightness:** 8 Daylight & 4 Night Vision
- Windage & Elevation Adjustment:** 0.5 MOA Per Click
- Window Size:** 20mm Diameter
- Housing Material:** Grade 5 Titanium
- Central Mount Height (in):** 1.41

SKU

HE515GT-RD		HE515GT-GR	
HE515CT-RD		HE515CT-GR	

SPECIFICATIONS

	HE515CM-GR	HS515CM	HE515GM-GR	HS515GM
FUNCTIONS				
Selectable Reticle		•		
Solar Power	•		○	
Shake Awake Technology		•		
Memory		•		
OPTICAL DATA				
Light Source	LED			
Wavelength	540nm	650nm	540nm	650nm
No Parallax		•		
Unlimited Eye Relief		•		
Magnification	1x			
ELECTRONIC DATA				
Battery	CR2032			
Battery Life (Setting 6)	50,000 Hours			
Brightness Settings	8 DLt & 4 NV Compatible			

	HE515CM-GR	HS515CM	HE515GM-GR	HS515GM			
MECHANICAL DATA							
Housing Material	6061 T6 Aluminum		7075 T6 Aluminum				
Surface Finish		Hard Anodized					
Housing Color		Black					
Adjustment per Click		0.5 MOA					
W&E Travel Range		± 50 MOA					
Storage Temperature		-40°C-70°C					
Working Temperature		-40°C-60°C					
Submersion		IPX8					
Vibration		1000G					
PHYSICAL DATA							
Window Size (in)	0.78 Diameter						
Body Dimensions (in)	2.75x1.43x1.63		2.73x1.53x1.61				
Body Weight (oz)	3.53		3.74				
Mount Weight (oz)	6.3		6.5				

SPECIFICATIONS

	HE515GT-RD	HE515GT-GR	HE515CT-RD	HE515CT-GR
FUNCTIONS				
Selectable Reticle		•		
Solar Power	○		•	
Shake Awake Technology		•		
Memory		•		
OPTICAL DATA				
Light Source	LED			
Wavelength	650nm	540nm	650nm	540nm
Reticle	2 MOA Dot & 65 MOA Circle			
No Parallax		•		
Unlimited Eye Relief		•		
Magnification	1x			
ELECTRONIC DATA				
Battery	CR2032			
Battery Life (Setting 6)	50,000 Hours			
Brightness Settings	8 DLt & 4 NV Compatible			
MECHANICAL DATA				
Housing Material	Titanium			
Surface Finish	Titanium Finish			
Housing Color	Black			
Adjustment per Click	0.5 MOA			
W&E Travel Range	± 50 MOA			
Storage Temperature	-40°C-70°C			
Working Temperature	-40°C-60°C			
Submersion	IPX8			
Vibration	1000G			
PHYSICAL DATA				
Window Size (in)	0.78mm Diameter			
Body Dimensions (in)	2.67x1.45x1.6			
Body Weight (oz)	4.33		4.06	
Mount Weight (oz)	4.33		4.33	



6 MAGNIFIERS

NEW

HM3X-MICRO

PRODUCT OVERVIEW

The Holosun HM3X-MICRO delivers 3x magnification in a smaller, lighter housing for streamlined rifle setups. Built from durable 6061-T6 aluminum with an MAO finish, it offers clear optical performance through precision glass. The HM3X-MICRO features a flip-to-the-side mount design compatible with absolute and lower 1/3 co-witness optics, and includes a QD mount and spacer for easy installation. With 67 mm of eye relief, a 7° field of view, and nitrogen-purged, IP67-sealed construction, the HM3X-MICRO provides dependable clarity and rugged reliability in a compact, adaptable package.



TECHNOLOGY & FEATURES

- Compact, lightweight 3x magnifier for rifle optics
- Flip-to-the-side mount with QD release and spacer included
- Compatible with absolute and lower 1/3 co-witness heights
- **Exit Pupil:** 7.1mm
- **Eye Relief:** 67mm
- **Dimensions:** 2.76 x 2.44 x 1.81 in
- **Weight:** 8.47oz
- **Central Mount Height:** 0.972 in

SKU

HM3X-MICRO

3x

SPECIFICATIONS

OPTICAL DATA	
Magnification	3X
Field of View	7°
Diopter	±3D
Transmittance	0.75
Lens Material	Optical Glass
ENVIRONMENT DATA	
Storage Temperature (°C)	-40°C~70°C
Operating Temperature (°C)	-30°C~60°C
Humidity (%)	0.95
Waterproof	1 meter 30 min
Nitrogen (Concentration)	99%
Vibration Resistance (1000)	<2MOA
MECHANICAL DATA	
Housing Material	6061 Aluminum
Housing Finish	Anodized
Dimensions (in)	2.76 x 2.44 x 1.81



HM3X**HM3X-T****TECHNOLOGY & FEATURES**

- 3X Magnification
- Flip-to-the-side Design
- Compatible with Absolute & Lower 1/3 Height Optics
- QD Mount & Spacer Included
- **HM3X** - Durable Aluminum Housing
- **HM3X-T** - Grade 5 Titanium Housing
- **Lens Material:** Optical Glass
- **IP Rating:** IP67
- **Eye Relief:** 70mm / 2.75 in
- **Exit Pupil:** 7.6mm / 0.29 in
- **Weight:** HM3XT:10.5 oz; HM3X: 10.9 oz

SKU

HM3X	HM3X-T
3x	3x

HM6X**TECHNOLOGY & FEATURES**

- 6X Magnification
- Flip-to-the-side Design
- Compatible with Absolute & Lower 1/3 Height Optics
- QD Mount & Spacer Included
- 7075 T6 Aluminum Housing
- **Lens Material:** Optical Glass
- **IP Rating:** IP67
- **Eye Relief:** 65mm / 2.55 in
- **Exit Pupil:** 4.6mm / .18 in
- **Weight:** 11.6 oz

SKU

HM6X
6x

SPECIFICATIONS

	HM3X	HM3X-T
OPTICAL DATA		
Exit Pupil	7.6mm	6.4mm
Eye Relief	70mm	65mm
Field of View	7°	6.6°
Diopter	±3D	
Transmittance	0.75	
MECHANICAL DATA		
Storage Temperature (°C)	-40°C~70°C	
Operating Temperature (°C)	-30°C~60°C	
Humidity (%)	0.95	
Submersion	IP67	
Nitrogen (Concentration)	99%	
Vibration	<2MOA	
Housing Finish	MAO	Titanium
PHYSICAL DATA		
Dimensions (in)	4×1.7×2.5	3.2 x 1.8 x 2.5
Weight (oz)	10.9	10.5

SPECIFICATIONS

OPTICAL DATA	
Exit Pupil	4.6mm
Eye Relief	65mm
Field of View	3.7°
Diopter	±3D
Transmittance	0.75
MECHANICAL DATA	
Storage Temperature (°C)	-40°C~70°C
Operating Temperature (°C)	-30°C~60°C
Humidity (%)	0.95
Submersion	IP67
Nitrogen (Concentration)	99%
Vibration	<2MOA
Housing Finish	Anodized
PHYSICAL DATA	
Dimensions (in)	4.33 x 1.8 x 2.5
Weight (oz)	11.6



7 LASERS

NEW IRIS-ARC

PRODUCT OVERVIEW

The Holosun IRIS-ARC is a dedicated IR illuminator engineered for demanding night-vision performance from close quarters to long-range observation. Powered by a high-output IR VCSEL, the IRIS-ARC projects a clean, uniform beam that instantly transitions from a tight 3° spot to a wide 40° flood using Holosun's signature top-mounted slider. Its 7075-T6 aluminum housing, IPX8 submersion rating, and ruggedized internals ensure dependable use in harsh environments. A rear push button and a Crane-plug single-button pressure pad provide flexible activation options, while the standard Scout-pattern interface allows broad aftermarket mount compatibility. Compact, efficient, and purpose-built, the IRIS-ARC delivers controlled IR illumination for night-vision professionals operating across varying distances.



TECHNOLOGY & FEATURES

- Adjustable IR beam rapidly shifts from long-range spot to close-range flood via the top slider.
- Includes Crane-plug remote pressure pad for single-button activation.
- High-output IR VCSEL delivers clean, consistent illumination for night-vision devices.
- IRIS-ARC Output at 3-40 degrees is 20-260mW
- Standard Scout mount pattern supports a wide range of aftermarket mounts.

SKU

IRIS-ARC


SPECIFICATIONS

FUNCTIONS		MECHANICAL DATA	
IR Laser Illuminator	•	Housing Material	7075 T6 Aluminum
OPTICAL DATA		Surface Finish	Hard Anodized
IR Pointer or Illuminator Output Power (mW)	<260	Housing Color	Black
IR Pointer or Illuminator Class	Class 3R	Storage Temperature	-40°C~70°C
IR Laser Wavelength (nm)	820-880	Working Temperature	-30°C~51°C
ELECTRONIC DATA		Submersion	IPX8
Battery	1x CR123A	Vibration	1000G
PHYSICAL DATA			
		Dimensions (in)	4.53×1.14×1.3
		Weight (oz)	4.1



IRIS-1

PRODUCT OVERVIEW

IRIS 1 is a single function laser device with a redesigned 7075 aluminum housing that reduces weight by 33% and reduces overall height by 20%. Additionally, the IRIS 1 now features an on-board fire button for momentary or constant ON functions as well as an updated, rear-facing selector switch to select modes and power for both the on-board fire button and the included remote activation button. IRIS 1 is available in Red, Green, or Infrared (IR) versions.



TECHNOLOGY & FEATURES

- VCSEL Laser IR Pointer
- **IR Laser:** 0.7mW VCSEL
- New Compact Housing Design
- **Green / Red Laser:** 5mW
- Intensity Selector Switch
- **Battery Type:** AA
- **Housing Material:** 7075 T6 Aluminum

SKU

IRIS-GR1 IRIS-RD1



IRIS-IR1



SPECIFICATIONS

	IRIS-GR1	IRIS-RD1	IRIS-IR1
FUNCTIONS			
Green Laser Pointer	•	○	○
Red Laser Pointer	○	•	○
IR Laser Pointer	○	○	•
OPTICAL DATA			
Green/Red Laser Output Power	<5mW		
Green or Red Laser Class	3R		
IR Pointer/Illuminator Output Power	<0.7mW		
IR Pointer or Illuminator Class	1		
Green Laser Wavelength (nm)	520	-	-
Red Laser Wavelength (nm)	-	635	-
IR Laser Wavelength (nm)	-	-	800-880
ELECTRONIC DATA			
Battery	1x AA		
MECHANICAL DATA			
Housing Material	7075 T6 Aluminum		
Surface Finish	Hard Anodized		
Housing Color	Black		
Laser Adjustment Per Click	0.5 MOA		
Laser W&E Travel Range	±50 MOA		
Storage Temperature	-40°C~70°C		
Working Temperature	-20°C~51°C		
Submersion	IPX8		
Vibration	1000G		
PHYSICAL DATA			
Dimensions (in)	3.4×1.6×1.2		
Weight (oz)	4.6		

IRIS-2

PRODUCT OVERVIEW

IRIS 2 is a dual-function multi-laser device with a redesigned 7075 aluminum housing that reduces weight by 45% and sits 21% lower than the previous model. Additionally, the IRIS 2 now features a center-positioned fire button for ambidextrous activation of momentary or constant ON functions. An updated, rear-facing power and mode selector switch offers improved ergonomics and feel. IRIS 2 also includes a new, ultra-compact remote fire button. IRIS 2 features a VIS (visible) laser pointer and an infrared (IR) laser pointer. IRIS 2 is available with either a green or red VIS pointer.




TECHNOLOGY & FEATURES


- VCSEL Laser IR / Visible Pointers
- **IR Laser:** 0.7mW VCSEL
- New Compact Housing Design
- **Green / Red Laser:** 5mW
- Coaxial Laser Mechanism
- Intensity Selector Switch
- **Battery Type:** CR123A
- **Weight:** 5oz

SKU

IRIS-GR2



IRIS-RD2



SPECIFICATIONS

	IRIS-RD2	IRIS-GR2
FUNCTIONS		
Green Laser Pointer	○	•
Red Laser Pointer	•	○
IR Laser Pointer	•	•
OPTICAL DATA		
Green/Red Laser Output Power	<5mW	
Green or Red Laser Class	3R	
IR Pointer/Illuminator Output Power	<0.7mW	
IR Pointer or Illuminator Class	1	
Green Laser Wavelength (nm)	-	520
Red Laser Wavelength (nm)	635	-
IR Laser Wavelength (nm)	800-880	
ELECTRONIC DATA		
Battery	1x CR123A	
MECHANICAL DATA		
Housing Material	7075 T6 Aluminum	
Surface Finish	Hard Anodized	
Housing Color	Black	
Laser Adjustment Per Click	0.5 MOA	
Laser W&E Travel Range	±50 MOA	
Storage Temperature	-40°C~70°C	
Working Temperature	-30°C~51°C	
Submersion	IPX8	
Vibration	1000G	
PHYSICAL DATA		
Dimensions (in)	3.2×1.85×1.3	
Weight (oz)	5	

IRIS-3

PRODUCT OVERVIEW

IRIS 3 is a triple function multi-laser device with a redesigned 7075 aluminum housing that is 43% lighter and sits 20% lower than the previous model. IRIS 3 now boasts a powerful 40mW IR (infrared) illuminator along with a VIS (visible) laser pointer and infrared (IR) laser pointer. Additionally, the IRIS 3 now features a center-positioned fire button for ambidextrous activation of momentary or constant ON functions. IRIS 3 also features updated, rear-facing power and mode selector switches with improved ergonomics and feel. An all-new, ultra-compact two-button remote activation switch features a VIS override function and is included. IRIS 3 is available with either a green or red VIS laser pointer.



TECHNOLOGY & FEATURES

- VCSEL Laser IR Pointer and Illuminator
- Compact Housing Design
- Quick Adjustable Focus IR Illuminator
- Coaxial Laser Mechanism
- High/Low Intensity Selector Switch
- **IR Illuminator: 40mW VCSEL**
- **IR Laser: 0.7mW VCSEL**
- **Green / Red Laser: 5mW**
- **Battery Type: CR123A**
- **Weight: 6.4oz**

SKU

IRIS-GR3



IRIS-RD3



SPECIFICATIONS

	IRIS-RD3	IRIS-GR3	
FUNCTIONS			
Green Laser Pointer	○	●	
Red Laser Pointer	●	○	
IR Laser Pointer	●		
IR Laser Illuminator	●		
OPTICAL DATA			
Green/Red Laser Output Power	<5mW		
Green or Red Laser Class	3R		
IR Pointer/Illuminator Output Power	<0.7mW		
IR Pointer or Illuminator Class	1		
Green Laser Wavelength (nm)	-	520	
Red Laser Wavelength (nm)	635	-	
IR Laser Wavelength (nm)	800-880		
ELECTRONIC DATA			
Battery	1x CR123A		
MECHANICAL DATA			
Housing Material	7075 T6 Aluminum		
Surface Finish	Hard Anodized		
Housing Color	Black		
Laser Adjustment Per Click	0.5 MOA		
Laser W&E Travel Range	±50 MOA		
Storage Temperature	-40°C~70°C		
Working Temperature	-30°C~51°C		
Submersion	IPX8		
Vibration	1000G		
PHYSICAL DATA			
Dimensions (in)	3.2×1.97×1.34		
Weight (oz)	6.4		

IRIS-4

PRODUCT OVERVIEW

IRIS 4 is a quad-function multi-laser device with a redesigned 7075 aluminum housing that is 43% lighter, 29% lower, and 28% narrower than the previous model. IRIS 4 now boasts a powerful 40mW infrared (IR) illuminator and a 1,000 lumen / 25,000 candela white light along with a VIS (visible) laser pointer and infrared (IR) laser pointer. Additionally, the IRIS 4 now features independent fire buttons for ambidextrous activation of momentary or constant ON functions. IRIS 4 also features an updated, rear-facing power and mode selector switch with improved ergonomics and feel. An all-new, three-button remote activation switch is included and features a VIS override function. IRIS 4 is available with either a green or red VIS pointer.



TECHNOLOGY & FEATURES

- VCSEL Laser IR Pointer and Illuminator with LED White Light
- New Compact Housing Design
- Quick Adjustable Focus IR Illuminator
- Coaxial Laser Mechanism
- Intensity Selector Switch
- **IR Illuminator: 40mW VCSEL**
- **IR Laser: 0.7mW VCSEL**
- **Green / Red Laser: 5mW**
- **LED Light: 800 Lumens / 20,000 Candela**
- **Battery Type: 1x 18650 / 2x CR123A**
- **Weight: 8.5oz**

SKU

IRIS-GR4



IRIS-RD4



SPECIFICATIONS

	IRIS-GR4	IRIS-RD4	
FUNCTIONS			
Green Laser Pointer	○	●	
Red Laser Pointer	●	○	
IR Laser Pointer	●		
IR Laser Illuminator	●		
Flashlight	●		
IR LED Illuminator	●		
OPTICAL DATA			
Green/Red Laser Output Power	<5		
Green or Red Laser Class	3R		
IR Pointer/Illuminator Output Power	<0.7		
IR Pointer or Illuminator Class	1		
Green Laser Wavelength (nm)	-	520	
Red Laser Wavelength (nm)	635	-	
IR Laser Wavelength (nm)	800-880		
Flashlight Output Power (lum)	800		
Candela (cd)	20,000		
ELECTRONIC DATA			
Battery	1x 18650 / 2x CR123A		
MECHANICAL DATA			
Housing Material	7075 T6 Aluminum		
Surface Finish	Hard Anodized		
Housing Color	Black		
Laser Adjustment Per Click	0.5 MOA		
Laser W&E Travel Range	±50 MOA		
Storage Temperature	-40°C~70°C		
Working Temperature	-30°C~51°C		
Submersion	IPX8		
Vibration	1000G		
PHYSICAL DATA			
Dimensions (in)	4.2×2.3×1.4		
Weight (oz)	8.5		

LE117**LE221****LE321****LE420****TECHNOLOGY & FEATURES**

- Visible or IR Laser Designator
- High/Low Mode Selector
- Quick Detach Mount
- IR Laser:** 0.7mW
- Green / Red Laser:** 5mW
- Battery Type:** CR123A
- Housing Material:** Titanium

SKU

LE117-GR	LE221-GR
	+
LE117-R	LE221-RD
LE117-IR	

SPECIFICATIONS

	LE117-R	LE117-GR	LE117-IR	LE221-RD	LE221-GR
FUNCTIONS					
Green Laser Pointer	○	●	○	○	●
OPTICAL DATA					
Green/Red Laser Output Power	<5mW	<0.7mW	<5mW		
Green or Red Laser Class	3R	-	-	3R	
IR Pointer/Illuminator Output Power	-		<0.7mW		
IR Pointer or Illuminator Class	-		1		
Green Laser Wavelength (nm)	-	520	-	-	520
Red Laser Wavelength (nm)	635	-	-	635	-
IR Laser Wavelength (nm)	-	-	830		
ELECTRONIC DATA					
Battery				1x CR123A	
MECHANICAL DATA					
Housing Material				Titanium	
Surface Finish				Titanium Finish	
Housing Color				Black	
Laser Adjustment Per Click				0.5 MOA	
Laser W&E Travel Range				±50 MOA	
Storage Temperature				-40°C~65°C	
Working Temperature				-40°C~51°C	
Submersion				IPX8	
Vibration				1000G	
PHYSICAL DATA					
Dimensions (in)				3.43×1.77×1.34	

	LE321-RD	LE321-GR	LE420-GR
FUNCTIONS			
Green Laser Pointer	○	●	●
Red Laser Pointer	●	○	○
IR Laser Pointer		●	
IR Laser Illuminator		●	
Flashlight	○	○	●
IR LED Illuminator		●	
OPTICAL DATA			
Green/Red Laser Output Power		<5mW	
Green or Red Laser Class		3R	
IR Pointer/Illuminator Output Power		<0.7mW	
IR Pointer or Illuminator Class		1	
Green Laser Wavelength (nm)	-		520
Red Laser Wavelength (nm)	635		-
IR Laser Wavelength (nm)		830	
Flashlight Output Power (lum)		600	
ELECTRONIC DATA			
Battery		1x CR123A	2x CR123A
MECHANICAL DATA			
Housing Material		Titanium	
Surface Finish		Titanium Finish	
Housing Color		Black	
Laser Adjustment Per Click		0.5 MOA	
Laser W&E Travel Range		±50 MOA	
Storage Temperature		-40°C~65°C	
Working Temperature		-40°C~51°C	
Submersion		IPX8	
Vibration		1000G	
PHYSICAL DATA			
Dimensions (in)		3.7×2.24×1.46	3.66×3.07×1.46

TECHNOLOGY & FEATURES

- Visible or IR Laser Designator
- Coaxial Laser Mechanism
- Mode / Intensity Selector Switch
- Quick Detach Mount
- IR Illuminator:** 0.7mW
- IR Laser:** 0.7mW
- Green / Red Laser:** 5mW
- LED Light:** 600 Lumens (LE420)
- Battery Type:** CR123A

SKU

LE321-GR			
LE321-RD			
LE420-GR			

SPECIFICATIONS

RML

PRODUCT OVERVIEW

The RML (Rail Mounted Laser) is a miniature red laser aiming device designed for handgun applications. The RML features a durable polymer housing and is powered by a CR1/3N lithium battery. The RML has ambidextrous activation buttons and includes adapter keys for universal compatibility. The RML is IP68 certified waterproof and dust proof and has a robust windage and elevation adjustment mechanism with tactile clicks for excellent zero retention under recoil and is compatible with many weaponlight holsters.



TECHNOLOGY & FEATURES

- Green, Red or IR Laser Designators
- **IR Laser:** 0.7mW
- Tactile Windage & Elevation Adjustments
- **Green / Red Laser:** 5mW
- Compatible with most Weapon Light holsters
- **Battery Type:** 1/3N
- **Housing Material:** Durable Polymer Housing

SKU

RML-GR RML-RD



RML-IR



SPECIFICATIONS

	RML-RD	RML-GR	RML-IR
FUNCTIONS			
Green Laser Pointer	○	●	○
Red Laser Pointer	●	○	○
IR Laser Pointer	○	○	●
OPTICAL DATA			
Green/Red Laser Output Power (mW)	<5	<0.7	
Green or Red Laser Class	3R	-	
IR Pointer or Illuminator Class	-	1	
Green Laser Wavelength (nm)	-	520	-
Red Laser Wavelength (nm)	635	-	
IR Laser Wavelength (nm)	-	800-880	

	RML-RD	RML-GR	RML-IR
ELECTRONIC DATA			
Battery		CR1/3N	
Battery Life	100 Minutes	300 Minutes	
MECHANICAL DATA			
Housing Material	Polymer		
Surface Finish	Paint		
Housing Color	Black		
Laser Adjustment per Click	4 MOA		
Laser W&E Travel Range	±60 MOA		
Storage Temperature	-40°C-70°C		
Working Temperature	-10°C-51°C		
Submersion	IPX8		
Vibration	2000G		
PHYSICAL DATA			
Dimensions (in)	1.97×1.18×0.91		
Weight (oz)	1.3		

RMLt

PRODUCT OVERVIEW

The RMLt (Rail Mounted Laser) is a miniature IR laser aiming device designed for handgun applications. The RMLt features a Grade 5 Titanium housing and is powered by a CR1/3N lithium battery. The RMLt has ambidextrous activation buttons and includes adapter keys for universal compatibility. The RMLt is IP68 certified waterproof and dust proof and has a robust windage and elevation adjustment mechanism with tactile clicks, excellent zero retention under recoil and is compatible with many weaponlight holsters.



TECHNOLOGY & FEATURES

- Green, Red or IR Laser Designators
- **IR Laser:** 0.7mW
- Universal Rail Mount
- Tactile Windage & Elevation Adjustments
- **Green / Red Laser:** 5mW
- **Battery Type:** 1/3N
- Compatible with most Weapon Light holsters
- **Housing Material:** IPX8
- **Housing Material:** Grade 5 Titanium

SKU

RMLt-GR RMLt-RD



RMLt-IR



SPECIFICATIONS

	RMLt-RD	RMLt-GR	RMLt-IR
FUNCTIONS			
Green Laser Pointer	○	●	○
Red Laser Pointer	●	○	○
IR Laser Pointer	○	○	●
OPTICAL DATA			
Green/Red Laser Output Power (mW)	<5	<0.7	
Green or Red Laser Class	3R	-	
IR Pointer or Illuminator Class	-	1	
Green Laser Wavelength (nm)	-	520	-
Red Laser Wavelength (nm)	635	-	
IR Laser Wavelength (nm)	-	800-880	

	RMLt-RD	RMLt-GR	RMLt-IR
ELECTRONIC DATA			
Battery		CR1/3N	
Battery Life	100 Minutes	300 Minutes	
MECHANICAL DATA			
Housing Material	Titanium		
Surface Finish	Titanium Finish		
Housing Color	Black		
Laser Adjustment per Click	4 MOA		
Laser W&E Travel Range	±60 MOA		
Storage Temperature	-40°C-70°C		
Working Temperature	-10°C-51°C		
Submersion	IPX8		
Vibration	2000G		
PHYSICAL DATA			
Dimensions (in)	1.97×1.18×0.91		
Weight (oz)	1.3		



8 PRISM SIGHTS

MP3X

PRODUCT OVERVIEW

The MP3X is a rugged 3X fixed-magnification, micro-sized prism optic designed for speed at close distances and precision at intermediate ranges. MP3X features a 7075-aluminum housing with a prism optical system to produce a brilliant sight picture. The MP3X reticle is etched, astigmatism-friendly, and illuminated with both red and green and features BDC holdovers with ranging functionality.




TECHNOLOGY & FEATURES

- **Reticle Colors:** Dual Illumination Red or Green
- **FOV:** 6.6°
- **Reticle Style:** BDC Dot
- **Battery Type:** CR2032
- **Mount:** Quick Detach Picatinny
- **Reticle Brightness:** 10 Daylight & 2 Night Vision
- **Magnification:** 3x
- **Housing Material:** 7075 T6 Aluminum
- **Eye Relief:** 65mm / 2.55 in
- **Central Mount Height:** 1.41 in
- **Exit Pupil:** 6.4mm / .25 in
- **Central Mount Height:** 1.41 in

SKU

MP3X-BDC



SPECIFICATIONS

OPTICAL DATA	
Exit Pupil	6.4mm
Eye Relief	65mm
Field of View	6.6°
Diopter	±3D
Transmittance	0.75
Lens Material	Optical Glass
ENVIRONMENT DATA	
Storage Temperature (°C)	-40°C-70°C
Operating Temperature (°C)	-30°C-60°C
Humidity (%)	0.95
Waterproof	1 meter 30 min
Nitrogen (Concentration)	99%
Vibration Resistance (1000)	<2MOA
MECHANICAL DATA	
Housing Finish	Anodized
Dimensions (in)	3.15×2.05×2.45
Weight (oz)	8.82





WEAPONLIGHTS

9

P.ID-PRO

PRODUCT OVERVIEW

The P.ID PRO introduces IR (infrared) capabilities to the P.ID line of weapon lights, offering a full-featured solution for night vision users and ensuring seamless performance across both visible and infrared spectrums. P.ID Pro incorporates a VIS (visible) laser, IR laser, 500 lumen / 8000 candela LED white light, and a powerful 350mW LED IR illuminator to provide ultimate low-light versatility and target identification.



TECHNOLOGY & FEATURES

- Universal, Picatinny Mounting
- **IR Illumination:** 350mW LED
- **Lumens:** 500
- **Lux:** 8000
- **Travel Range:** ± 50 MOA
- **Housing Material:** 7075 T6 Aluminum
- **IP Rating:** IPX8
- **Battery Type:** 2x CR123A
- **Dimensions:** 3.2 x 1.6 x 1.4 in
- **Weight:** 5.3oz

SKU

P.ID-PRO



IR ILLUMINATOR LED WHITE LIGHT

SPECIFICATIONS

FUNCTIONS		ELECTRONIC DATA	
Green Laser Pointer	•	Battery	2x CR123A
IR Laser Pointer		MECHANICAL DATA	
Flashlight	•	Housing Material	7075 T6 Aluminum
IR LED Illuminator	•	Surface Finish	Hard Anodized
OPTICAL DATA		Housing Color	Black
Green Laser Output (mW)	<5	Laser Adjustment Per Click	4MOA
Green Laser Class	3R	Laser W&E Travel Range	±50 MOA
Green Laser Wavelength (nm)	520	Storage Temperature	-40°C~70°C
IR Laser Output (mW)	<0.7	Working Temperature	-30°C~51°C
IR Laser Class	1	Submersion	IPX8
IR Laser Wavelength (nm)	820-880	Vibration	1000G
IR Illuminator (mW)	350	PHYSICAL DATA	
IR Illuminator Wavelength (nm)	820-880	Dimensions (in)	3.2x1.6x1.4
Flashlight Output Power (lum)	500	Weight (oz)	5.3
Flashlight Candela (cd)	8000		



P.ID-K

PRODUCT OVERVIEW

The Holosun P.ID-K sets a new standard in compact weaponlights, offering a combination of power and precision. Features a powerful flashlight with an impressive 1,000 lumens output and 10,000 candela, this weaponlight ensures optimal visibility in low-light conditions. The P.ID-K introduces redesigned activation switches, with enhanced traction ensuring swift and intuitive control. With its compact dimensions, this weaponlight is tailored to be a perfect fit for most compact handguns, delivering a powerful illumination solution without compromising maneuverability.



TECHNOLOGY & FEATURES

- Rail Adapters Keys Included
- Lumens: 500
- Universal Mounting System
- Candela: 6,500
- 20% Shorter Overall Length Compared to P.ID
- Housing Material: 7075 T6 Aluminum
- Included USB Magnetic Charging Cable
- Dimensions: 2.6 x 1.2 x 1.3 in
- Weight: 3.2oz

SKU

P.ID-K



LED WHITE LIGHT



SPECIFICATIONS

FUNCTIONS		ELECTRONIC DATA	
Flashlight	•	Battery	16340 Rechargeable
OPTICAL DATA		MECHANICAL DATA	
Flashlight Output Power High	500lum	Housing Material	7075 T6 Aluminum
Flashlight Output Power Low	250lum	Surface Finish	Hard Anodized
Flashlight Candela High (cd)	6500	Housing Color	Black
Flashlight Candela Low (cd)	3250	Storage Temperature	-40°C~70°C
		Working Temperature	-10°C~51°C
		Submersion	IPX8
		Vibration	1500G
PHYSICAL DATA		PHYSICAL DATA	
		Dimensions (in)	2.6x1.2x1.3
		Weight (oz)	3.2

P.ID



P.ID-HC



TECHNOLOGY & FEATURES

P.ID

- Lumens:** High - 1,000 / Low - 500
- Candela:** High - 23,000
- Runtime:** High - 30 Min

P.ID-HC

- Lumens:** High - 800 / Low - 400
- Candela:** High - 42,000
- Runtime:** High - 30 Min

- Fits Most x300 Duty Holsters
- USB Magnetic Charging w/ Cable
- Housing Material:** 7075 T6 Aluminum
- IP Rating:** IPX8
- Weight:** 5 oz

SKU

P.ID



LED WHITE LIGHT

P.ID-HC



LED WHITE LIGHT

P.ID-PLUS



P.ID-DUAL



TECHNOLOGY & FEATURES

P.ID-PLUS

- Lumens:** High - 900 / Low - 450
- Candela:** High - 20,000
- Runtime:** High - 30 Min
- Integrated Green Laser

P.ID-DUAL

- Lumens:** High - 800 / Low - 400
- Candela:** High - 16,000
- Runtime:** High - 30 Min
- Integrated Green Laser & IR Laser

- USB Magnetic Charging w/ Cable
- Housing Material:** 7075 T6 Aluminum
- IP Rating:** IPX8
- Weight:** 5.1 oz

SKU

P.ID-PLUS



LED WHITE LIGHT



+ GREEN

P.ID-DUAL



LED WHITE LIGHT



+ GREEN



+ IR

SPECIFICATIONS

	P.ID	P.ID-HC	ELECTRONIC DATA	
FUNCTIONS			Battery	18350
Green Laser Pointer	○		Battery Life	60 Minutes Low/30 Minutes High
MECHANICAL DATA				
Red Laser Pointer	○		Housing Material	7075 T6 Aluminum
IR Laser Pointer	○		Surface Finish	Anodized
IR Laser Illuminator	○		Housing Color	Black
Flashlight	●		Storage Temperature	-40°C~70°C
IR LED Illuminator	○		Working Temperature	-10°C~51°C
OPTICAL DATA				
Flashlight Output Power (lum)	500/1,000	400/800	Submersion	IPX8
Candela	11000/23000	21000/42000	Vibration	1000G
PHYSICAL DATA				
Dimensions (in)	3.2×1.2×1.4		Weight (oz)	5

	P.ID-PLUS	P.ID-DUAL	ELECTRONIC DATA	
FUNCTIONS			Battery	18350
Green Laser Pointer	●		Battery Life	60 Minutes Low/30 Minutes High
MECHANICAL DATA				
Red Laser Pointer	○		Housing Material	7075 T6 Aluminum
IR Laser Pointer	○	●	Surface Finish	Anodized
IR Laser Illuminator		○	Housing Color	Black
Flashlight	●		Laser Adjustment Per Click	4 MOA
OPTICAL DATA				
Green/Red Laser Output Power	<5mW		Green or Red Laser Class	Class 3R
IR Pointer/Illuminator Output Power	-	<0.7	IR Pointer or Illuminator Class	2M
Green Laser Wavelength (nm)	520		IR Laser Wavelength (nm)	830
IR Laser Wavelength (nm)	-	830	Flashlight Output Power (lum)	450/900
Candela	10000/20000	8500/16000	Dimensions (in)	3.6×1.2×1.4
Weight (oz)	5.1		Weight (oz)	1500G

RAID

PRODUCT OVERVIEW

The RAID (Rifle Area Illumination Device) is an all-new, highpower, long-gun white light that brings powerful illumination and user-interface versatility. RAID features 80,000 candela and 1,000 lumens for identification of targets and greater distances. RAID is activated via the included, compact, remote switch or using the integrated tail cap button. Mounting on Picatinny rails or M-LOK is covered out of the box, and the single 18650 USB-C rechargeable battery is also included. RAID has an ultra-durable 7075 aluminum body, is IP68 dust and waterproof, and withstands 1000g of shock.



TECHNOLOGY & FEATURES

- Included 18650 USB-C Rechargeable Battery
- Includes Single Button Crane Port Pressure Switch
- Integrated Tailcap Button
- M-LOK & Picatinny Mount Included
- Additional IR Head Attachment Available for Purchase (IR Bezel Sold Separately)
- **Tailcap:** Push Button & Crane Port Plug
- **Lumens:** 1,000
- **Candela:** 80,000
- **Battery Type:** USB-C Rechargeable 18650 Li-ion Battery
- **Housing Material:** 7075 T6 Aluminum
- **IP Rating:** IPX8

SKU

RAID



RAID-BZ-IR



SPECIFICATIONS

	RAID	RAID-BZ-IR		RAID	RAID-BZ-IR
FUNCTIONS					
Flashlight	•	○			
OPTICAL DATA					
IR Laser Wavelength (nm)	-	850nm			
Flashlight Output Power (lum)	1,000	-			
Candela (cd)	80,000	-			
IR Output Power (lum)	-	High: 500mW/Low: 200mW			
ELECTRONIC DATA					
Battery	18650	-			
MECHANICAL DATA					
Housing Material	7075 T6 Aluminum				
Surface Finish	Anodized				
Housing Color	Black				
Storage Temperature	-40°C~70°C				
Working Temperature	-10°C~51°C				
Submersion	IPX8				
Vibration	1000G				
PHYSICAL DATA					
Dimensions (in)	5.3×1.38	-			
Weight (oz)	5.3	-			







HOLOSUN

HOLOSUN TECHNOLOGIES, INC.™